# EasyView<sup>™</sup>Roller Shutters! The Roller Shutter With A Permanent View!



# NEW EasyView<sup>™</sup> Roller Shutter Brings The Outdoors Indoors!

- Both residential & commercial applications.
- Turn patios & verandahs into extra rooms.
- Shopping centre grilles & cafe applications.
- High quality aluminium & UV resistant polycarbonate profile.
- Commercial grade fully extruded profile.
- Wide shutter widths up to 4400mm.

- Fully retractable into an enclosed pelmet.
- Either manual or motorised operation.
- Various remote control options.
- Removable central support guides where required.
- Choice of profile colours.
- 5 Year Roller Shutter Guarantee.
- Made in Australia.





#### What Is EasyView<sup>™</sup>?

EasyView<sup>™</sup>is a strong roller shutter system constructed of an extruded aluminium and transparent, UV resistant polycarbonate profile, which provides added security and permanent views of the outdoors.

Suitable for a wide range of domestic applications, EasyView<sup>™</sup> is ideal for outdoor patio, verandah and pergola areas, providing permanent outside views in a modern and sleek design. EasyView<sup>™</sup> provides an affordable way of creating that extra room, while protecting you and your family from the elements in both Winter and Summer.

EasyView<sup>™</sup> is also suitable for various commercial and industrial, shop front, shopping centre grille, cafe, restaurant, counter top and internal separation barrier/doorway applications, or where both security and visibility are required.

The EasyView<sup>™</sup> roller shutter system also allows you to return your space to a fully open area with easy to remove central support guides where required. It's as easy as 1, 2, 3 with EasyView<sup>™</sup>!





Note: EasyView is suitable for internal & external use in low to medium wind environments. For high wind applications exceeding 25 km/h please consult a professional engineer to determine suitability or contact your CW Products representative. The EasyView product warranty does not cover excessive wind damage.

#### Manual Or Motorised Control Options



Steel Cable Winder (Up To 50Kg)\*



Spring Loaded With Key Lock



Remote Control With SolarSmart™ Automation 12V Motor (Up To 50Kg)



PowerSmart™ Control System With 12V Motor (Up To 50Kg) <sup>†</sup>\*



Wall Switch With 240V Electric Motor\*



Remote Control With 240V Electric SIMU Hz Motor



Key Switch With 240V Electric Motor




Crank Handle With 240V Electric Manual Override Motor



S-05 Remote Control (Key Ring Transmitter) With 240V Electric Motor & Multi-Function S-05 Radio Receiver & Control Unit

### The EasyView<sup>™</sup> Design At A Glance!




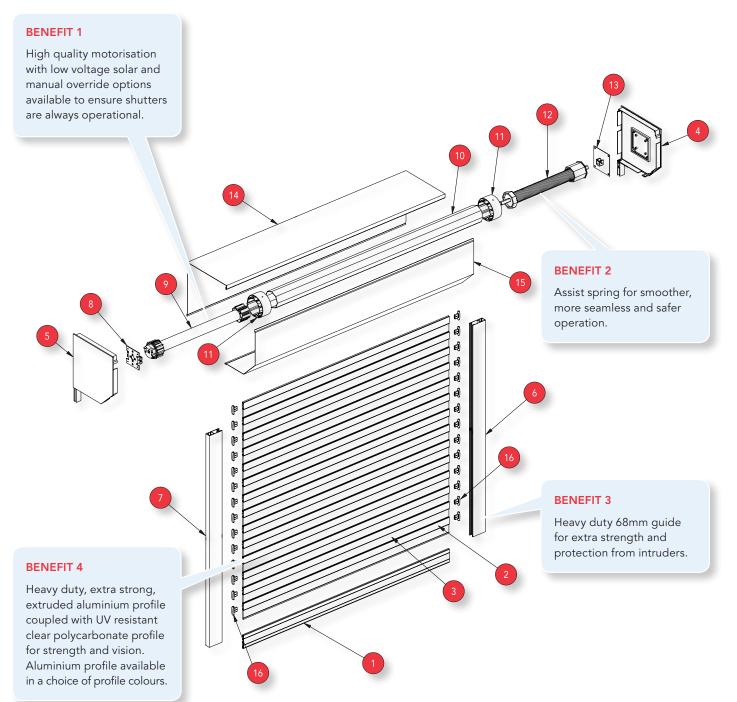

1	Heavy Duty Bottom Bar With Rubber Weather Seal	9	Tubular Motor With Crown & Driving Wheel
2	Extruded Aluminium Roller Shutter Profile	10	Octagonal 70mm Axle
3	Clear Polycarbonate Roller Shutter Profile	11	Ring Adaptors
4	RH Pelmet Side Frame	12	Assist Spring
5	LH Pelmet Side Frame	13	Assist Spring Bracket
6	RH Heavy Duty Guide	14	Pelmet Back
7	LH Heavy Duty Guide	15	Pelmet Cover
8	Tubular Motor Bracket	16	Profile End Clip

# EasyView<sup>™</sup> Technical Specifications

Maximum Shutter Width	Up To 4400mm
Maximum Shutter Height	Up To 3000mm
Maximum Surface Area	10m <sup>2</sup>
Curtain Weight/Metre <sup>2</sup>	6kg
Number Of Slats/Metre	28 (combined aluminium & polycarbonate slats)
Aluminium Profile Slat Covering	34mm
Polycarbonate Profile Slat Covering	38mm
Aluminium Profile Slat Thickness	9.3mm
Polycarbonate Profile Slat Thickness	4mm
Axle Types	Octagonal Aluminium or Steel
Bottom Bar Dimensions	60mm x 9mm
Guide Dimensions	68mm x 25mm/14mm (Heavy Duty Guide)
Paint Finish	High Quality Powder Coat

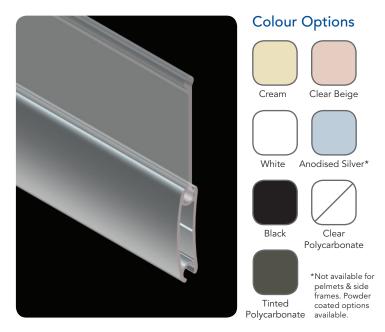

# For more information on the EasyView<sup>™</sup> Roller Shutter, please contact your nearest dealer, installer or visit www.cwproducts.com.au!

Authorised Dealer:

Illustrations, photos and colours shown in this brochure are for illustrative purposes only. All technical specifications and dimensions are correct at time of printing and may change without notice. Profile technical specifications and shutter performance may vary in certain applications, eg. wide applications with no solid structure behind the roller shutter. EasyView is suitable for internal & external use in low to medium wind environments. For high wind applications exceeding 25 km/h please consult a professional engineer to determine suitability or contact your CW Products representative. The EasyView product warranty does not cover excessive wind damage. EasyView and the EasyView logo are trademarks of CW Products. © 2015 CW Products.

Exclusively distributed in Australia by **CW Products** 13-23 Doecke Road Murray Bridge SA 5253 **Tel:** +61 8 8341 0120 **Fax:** +61 8 8341 1750 **Web:** www.cwproducts.com.au



